


EN / 01CEL462

Smart Power Strip

Four grounded outlets. Four USB ports. Wi-Fi control.

Socket EU4U4-WF

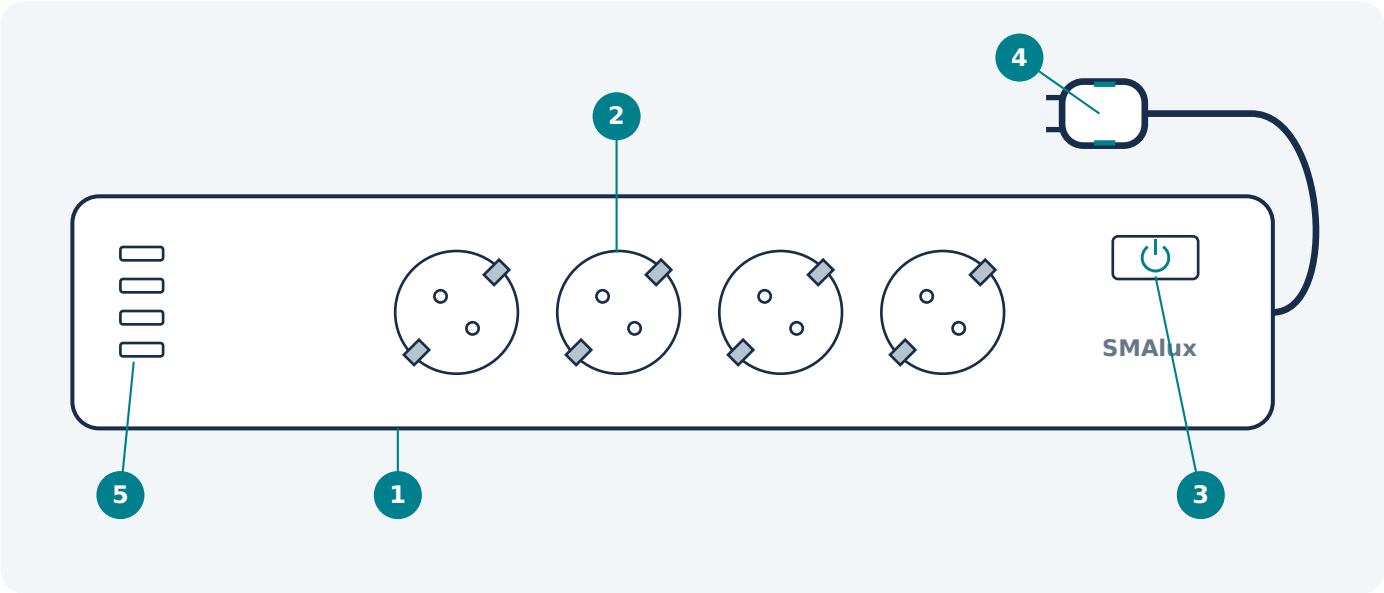

- 1

Power strip
- 2

AC outlet
- 3

Power button
- 4

Earthed plug
- 5

USB-A ports

Specifications

Model	Socket EU4U4-WF
Power supply	100-240 V AC, 50/60 Hz
Maximum power	2400 W at 240 V
AC current limit	10 A total; max. 10 A per outlet
Total USB output	5 V DC / 6 A maximum
USB output per port	2.4 A maximum
Ports	4 grounded AC outlets / 4 USB-A
Cable length	1.8 m
Wi-Fi	2.4 GHz
Storage temperature	-30°C to +60°C

Verified rating: 10 A total, according to the product label and packaging. The original setup text incorrectly stated 16 A. The operating-temperature limits are not confirmed because the original °C and °F values conflict.

EN / 02

Safety & first use

IMPORTANT Read and follow all instructions and warnings before use. Failure to comply may cause product damage, electric shock or injury. Keep this manual for future reference.

01 / Avoid overload

Do not exceed the rated current or power. The combined load of all AC outlets must not exceed 10 A. Overloading can cause overheating, damage, electric shock or fire.

02 / Check for damage

Do not use the strip if its housing, cord or plug is damaged.

03 / Do not modify

Do not repair, disassemble or modify the device. Doing so may cause damage, electric shock or injury.

04 / Avoid heat

Keep the strip away from heat sources and direct sunlight.

05 / Keep dry

Use only in dry indoor environments. Do not use in high humidity, near liquids or with wet hands. Keep the strip dry and clean.

06 / Stop if abnormal

If an unusual smell or heat comes from the strip or a connected device, unplug the strip, stop use and contact customer support immediately.

07 / Handle with care

Avoid excessive force when handling the strip.

08 / Clean safely

Unplug before cleaning. Do not use solvents or cleaning solutions. Wipe only with a soft, dry cloth.

Connect and switch on

In the box: 1 smart power strip and 1 user manual.

Plug the strip into an earthed, powered wall outlet. Press the power button to switch it on, then connect your devices. Keep the combined AC load within 10 A and the product's rated power.

USB limit: 2.4 A maximum per port; 6 A maximum across all USB ports combined. USB output voltage: 5 V DC.

EN / 03

Connect with the app

Quick connection using SMAlux for iOS or Android.



Install SMAlux

Scan the QR code or use the original app link below. App screens and wording may vary by version. The original manual describes Amazon Alexa and Google Assistant compatibility.

smartapp.tuya.com/smalux

1 Install the app

Use the QR code above to install SMAlux on your phone.

2 Register an account

Open SMAlux and register with your phone number or email address.

3 Verify and sign in

Enter the verification code you received, create a password and sign in.

4 Select the device

Choose the device type "Electrical Outlet" in the app.

5 Enter pairing mode

Press and hold the power button for more than 5 seconds until the indicator flashes quickly, about twice per second.

6 Confirm the indicator

Select "Confirm indicator rapidly blink", or the equivalent prompt in your app version.

7 Connect to Wi-Fi

Keep the device close to your router. Select a 2.4 GHz Wi-Fi network, enter its password and press "Confirm". The app shows "Connecting Now".

8 Complete setup

When connected successfully, the indicator stops flashing. You can then switch the device ON/OFF in the app.

Network requirement: 2.4 GHz Wi-Fi only. A 5 GHz-only network cannot be used for pairing.

EN / 04

Alternative AP mode

Use this alternative connection method when quick connection is unsuccessful.

1 Check the indicator

For AP setup, the green Wi-Fi indicator should flash slowly, once every 2 seconds. If this state cannot be obtained, contact the seller; do not assume a successful reset.

2 Choose AP mode

Tap “+” in the app’s main menu. Select “AP Mode” under Add Device, then “Next Step”.

3 Enter Wi-Fi details

Select your 2.4 GHz Wi-Fi network, enter its password and press “Next”.

4 Connect to the device

Press “Connect now”. Open your phone’s WLAN settings and select the “SMAlux” network. The original manual states that no password is required; Android may connect directly.

5 Return and confirm

Return to the app, press “Connect” and confirm the device named “SMAlux”. Once it has been added, you can control it in the app.

Troubleshooting

Devices do not charge or turn on

The strip may be off. Check that the power button is illuminated and the wall outlet has power.

Unusual smell or heat

The product may be defective. Unplug immediately, stop using it and contact customer service.

EN / 05

Warranty & support

Manufacturer's commercial warranty terms from the original manual.

Your statutory rights remain unaffected. The manufacturer's commercial warranty below is separate from mandatory consumer rights. It does not exclude or reduce the legal rights available against the seller under applicable law.

Period and coverage

The original manual warrants the quality of materials, workmanship and service for a minimum of 1 year from the purchase date.

Manufacturing defects and refunds

Products found defective due to manufacturing flaws may be replaced, subject to eligibility. The original terms state that refunds are available within the first 30 days after purchase.

Scope

The original commercial warranty applies to personal use only. It excludes commercial use, rental and uses for which the product was not intended. It is non-transferable. The original terms state that no warranties apply beyond those expressly provided with the product.

Original liability limitations

The original terms disclaim responsibility for damage, loss or inconvenience caused by equipment failure, user negligence, abuse or failure to follow the manual and additional safety, use or warning instructions in the packaging. These terms apply only insofar as permitted by applicable law.

Original exclusions

Damage due to abuse, accident, alteration, misuse, tampering or vandalism; improper or inadequate maintenance; damage during return transit; and unsupervised use by children under 18.

Original limitation of duration

The original terms limit express and implied warranties, including merchantability, to the period of the limited commercial warranty, subject to mandatory statutory rights.

For product support, contact the seller through www.kaito.hu or www.kaito.eu. Keep your proof of purchase. Do not open or repair the device yourself.

Consumer-rights information: Your Europe (European Union)

Revised 15 October 2026. Ratings checked against supplied product and packaging photos.